9" Capacity Orchard Chipper

Model 76854

Hinged cover provides quick access to the chipper blades.

16 reversible chipper blades produce the smallest chips in the industry.

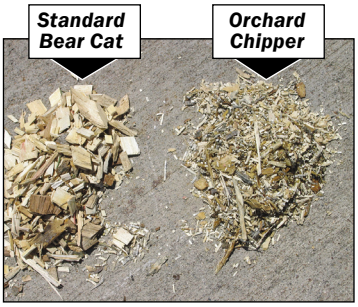

Seeing is believing! Compare the sizes above. The new 76854 achieves the smallest chips possible.

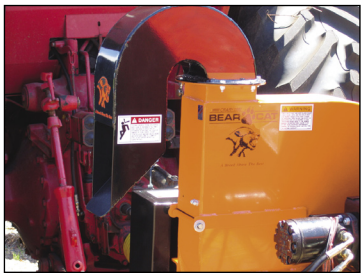

Low profile discharge places chips directly onto the ground.

Model	Engine	Size LxWxH)	Chipper Capacity	Feed System	Feed Opening	Weight (Lbs.)	3 Point Hitch	PTO
76854	PTO	69"x50"x93"	9"	hydraulic	9"x9"	1300	Cat. 1	540 rpm

- ***16 reversible chipper blades.***
- ***Low profile discharge places the chips directly onto the ground.***
- ***LOFA speed control system is a standard factory-installed feature.***
- ***Multiple positions available for 8" discharge chute.***
- ***Self-contained hydraulic feed system.***
- ***Hinged service cover.***

A Breed Above the Best

Find a dealer near you!

Call us at 800.247.7335 or
Log onto www.BearCatProducts.com

Email: sales@BearCatProducts.com • Fax: 701.282.9522

9" Orchard Chipper Specs

Model 76854

30" [76CM] DIAMETER DISC
- *Thirty inch diameter by 1.25" [3.175cm] thick disc that weighs 275 lbs. [125kg]*
- *Balanced for smooth operation.*
- *Disc turns at 1500 RPM.*

16 CHIPPING BLADES
- *Spaced on the disk to provide maximum coverage and produce an extremely small chip*

FOUR EDGE ADJUSTABLE ANVIL
- *To insure good chipping ability.*
- *9.25" long X 3.5" wide X .625" thick. [23.5cm x 8.9cm x 1.6cm]*

EASY ACCESS DISC
- *The disc is accessible through the hinged disc cover, which exposes one-half of the disc for easy access to the chipping blades and for easy clean out.*

INTEGRATED DISCHARGE BLOWER
- *Put the chips where you want them, directly onto the ground.*
- *Position the chute in multiple positions.*
- *Low profile discharge chute prevents chips from damaging branches.*

HEAVY-DUTY CONSTRUCTION
- *.375" [9.5mm] thick steel face plate on the disc housing;*
- *.25" [6.35mm] thick steel on the wrap around with welded construction*

SAFETY
- *Meets all applicable ANSI safety standards.*

BEARINGS
- *Two 1.75" [4.45cm] greasable bearings with 4 bolt cast flanges.*

FEED CHUTE
- *Opening 30.25" X 30.75" [76.8cm x 78.1cm], tray 28.31" [71.9cm] off the ground.*
- *Feed table is 38" [96.5cm] long.*

FEED THROAT
- *9" X 9" [22.86cm x 22.86cm]*

90° FEED ANGLE
- *Quicker chipping because you are cutting through less wood.*

MAXIMUM FEED SIZE
- *9" [20cm] for model 76854*

FEED SYSTEM
- *Self-contained with infinate feed rate settings.*
- *Single 15" [38cm] diameter feed roller with feed rate of 0-150fpm [0-45 meters/min].*
- *45 cu. in. [737cc] hydraulic motor.*
- *1750 psi [119 atm] operating pressure.*

FOLD DOWN FEED TRAY IS STANDARD ON #76854
- *Extends feed table by 30" [76.2cm].*

ELECTRONIC FEED SENSOR AND HOUR METER
- *Digital, programmable electronic feed sensor with hour meter. Hour meter has readout of total hours and daily hours.*

A Breed Above the Best

Find a dealer near you!

Call us at 800.247.7335 or
Log onto www.BearCatProducts.com

P.O. Box 849, West Fargo, ND 58078
Email: sales@BearCatProducts.com • Fax: 701.282.9522